



DESIGN FUNCTION PERFORMANCE



# Diesel & AdBlue®

## Product Guide

Diesel & AdBlue® Storage Tanks & Dispensers  
from 1,350 to 100,000 litres



01889 567700  
[www.tuffa.co.uk](http://www.tuffa.co.uk)



## Built on Trust

The Tuffa range of diesel and AdBlue® storage and dispensing tanks have been trusted by businesses for their diesel storage and dispensing needs for more than 40 years. Tanks are available from 1,350 to 100,000 litres.



### Why Tuffa?

- We are a British manufacturer with more than 40 years design and manufacturing experience.
- We build every tank to perform, last, and comply.
- We offer a vast range of customisable storage solutions in both plastic and steel.
- We design and innovate in-house, using British engineering at its core.

NEED MORE  
INFORMATION?  
CALL US ON  
01889 567700



### The Benefits

With Tuffa, you will benefit from the following:

- Reliable, responsive support — straight from the people who built your tank.
- Minimum 20-year design life and 10-year warranty on all bunded tanks, when registered.
- Tanks compatible with kerosene, gas oil and E-fuels such as HVO.
- Premium materials and equipment at competitive rates.
- Loyalty to our dealers.
- Industry approved tanks that are CE marked and fully compliant with current regulations and safety standards.



## Models and Specifications

### Bunded Diesel Tanks / Steel



#### 5000SBFS

Length	Width	Height
4,000mm	1,500mm	2,500mm
Capacity	Weight	
5,771 litres	1,500kg	



#### 10000SBFS

Length	Width	Height
4,450mm	1,830mm	2,400mm
Capacity	Weight	
10,256 litres	2,220kg	



#### 15000SBFS

Length	Width	Height
4,050mm	2,500mm	2,900mm
Capacity	Weight	
15,163 litres	2,850kg	



#### 20000SBFS

Length	Width	Height
4,500mm	2,500mm	3,500mm
Capacity	Weight	
21,313 litres	4,400kg	



#### 25000SBFS

Length	Width	Height
4,500mm	3,000mm	3,500mm
Capacity	Weight	
25,987 litres	4,850kg	



#### 30000SBFS

Length	Width	Height
5,050mm	3,000mm	3,500mm
Capacity	Weight	
30,345 litres	5,300kg	



#### 35000SBFS

Length	Width	Height
5,700mm	3,000mm	3,500mm
Capacity	Weight	
35,495 litres	5,800kg	



#### 40000SBFS

Length	Width	Height
6,300mm	3,000mm	3,500mm
Capacity	Weight	
40,249 litres	6,200kg	



#### 45000SBFS

Length	Width	Height
6,900mm	3,000mm	3,500mm
Capacity	Weight	
45,003 litres	6,600kg	



#### 50000SBFS

Length	Width	Height
7,550mm	3,000mm	3,500mm
Capacity	Weight	
50,152 litres	8,000kg	

# Models and Specifications

## Bunded Diesel Tanks / Plastic



### 1350SLBFS

Capacity	Length	Width	Height	Weight
1,350 litres	2,680mm	870mm	1,665mm	190kg



### 2500HBFS

Capacity	Length	Width	Height	Weight
2,500 litres	2,840mm	1,520mm	1,630mm	280kg



### 3500VBFS

Capacity	Diameter	Height	Weight
3,500 litres	2,013mm	2,520mm	350kg

Cabinet:

Height	Width	Depth
2,050mm	1,215mm	600mm



### 6000VBFS

Capacity	Diameter	Height	Weight
6,000 litres	2,550mm	2,585mm	430kg

Cabinet:

Height	Width	Depth
2,050mm	1,215mm	600mm



### 10000VBFS

Capacity	Diameter	Height	Weight
10,000 litres	2,890mm	2,590mm	500kg

Cabinet:

Height	Width	Depth
2,050mm	1,215mm	600mm



### 15000VBFS

Capacity	Diameter	Height	Weight
15,000 litres	2,890mm	3,500mm	700kg

Cabinet:

Height	Width	Depth
2,050mm	1,215mm	600mm



### 30000VBFS

Capacity*	Weight**
30,000 litres	1,330kg

Cabinet:


Height	Width	Depth
2,050mm	1,215mm	600mm

\* x2 15000VBFS interlinked

\*\* approximate

Largest  
Plastic Diesel  
Tanks in  
the UK



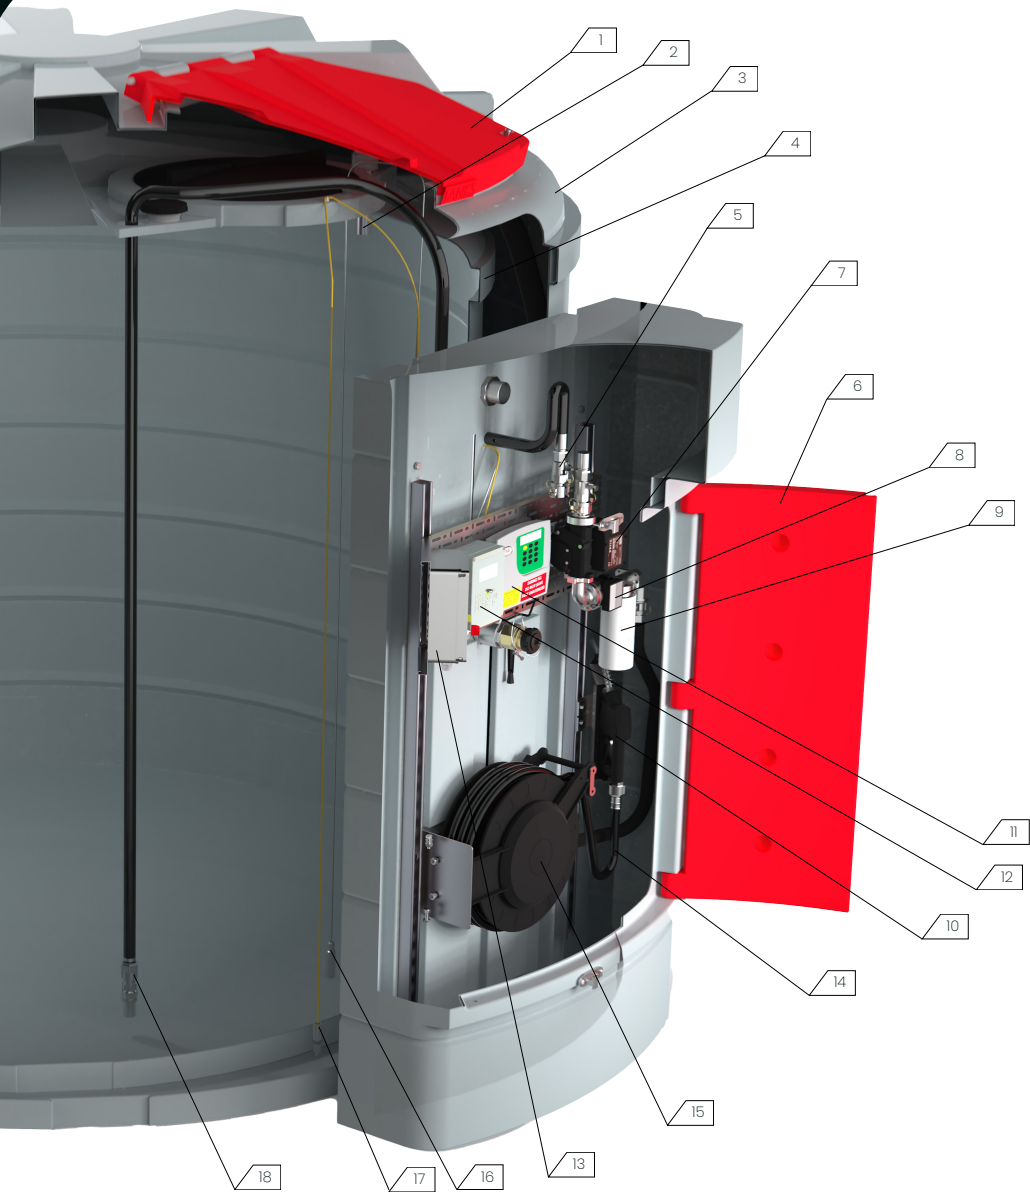

- |                                      |   |   |
|--------------------------------------|---|---|
| 1. Lockable Access Hatch             | 7. External Pump                        | 13. Electrical Control Panel                            |
| 2. Overfill Prevention Valve         | 8. Mechanical Flow/Pulse Meter          | 14. 8-Metre Dispensing Hose                             |
| 3. Bunded Outer Tank                 | 9. 10 Micron Water & Particulate Filter | 15. Retractable Hose Reel                               |
| 4. Internal Tank                     | 10. Automatic Shut-Off Nozzle           | 16. Level Pressure Sensor                               |
| 5. Isolation Valve                   | 11. Contents Gauge                      | 17. Bund Float Switch                                   |
| 6. High-Security Double-Door Cabinet | 12. Fuel Management System              | 18. Suction Line with In-Line Filter & Non-Return Valve |

# Models and Specifications

## Specifications – Bunded Diesel Tanks

	Small Diesel – Plastic	Large Diesel – Plastic	Large Diesel – Plastic	Large Diesel – Steel
Feature	1350-2500L	3500-15000L	30000L	5000-100000L
2" BSP Fill Point	✓	✓	✓	✓
Vent	✓	✓	✓	✓
6m Hose	✓	✓	✓	✓
Auto Shut-Off Nozzle	✓	✓	✓	✓
K33 Mechanical Flowmeter	✓	✓	✓	
Nozzle Holster	✓	✓	✓	✓
10 Micron Water & Particulate Filter	✓	✓	✓	✓
Lockable Flip Lid	✓			
Overfill Prevention Valve		✓	✓	
FMS Contents Gauge & Alarm – 230V		✓	✓	
Control Panel with Key Switch – 230V		✓	✓	
Lockable Cabinet		✓	✓	
High Security Cabinet with Roller Shutter Door				✓
C2020 Contents Gauge with Bund Alarm – 230V				✓
K44 Pulsemeter				✓
2x 2" Spare Sockets				✓
Channel Runners				✓
Lifting Eyes x 4				✓
Optional Extras				
Manual Float Level Gauge	001-T			
230V External Pump + Watchman Sonic	002-T			
230V External Pump + Watchman Sonic + Pulsemeter	003-T			
12/24V Pump	004-T			
12/24V Pump + Watchman Sonic	005-T			
230V External Pump + 1" Bottom Outlet	006-T			
230V External Pump + Watchman Sonic + 1" Bottom Outlet	007-T			
230V External Pump		001-T	001-T	001-T
230V External Pump + Pulsemeter		002-T	002-T	
230V High Flow Pump + 10m Hose Reel		003-T	003-T	004-T
230V High Flow Pump + 10m Hose Reel + Pulsemeter		004-T	004-T	
230V High Flow Pump + 10m Hose Reel + Fuel Management		005-T	005-T	008-T
230V External Pump + 10m Hose Reel		006-T	006-T	003-T
230V High Flow Pump		007-T	007-T	002-T
230V High Flow Pump + Pulsemeter		008-T	008-T	
230V External Pump + Fuel Management		009-T	009-T	005-T
230V High Flow Pump + Fuel Management		010-T	010-T	006-T
12V Pump		011-T		
24V Pump		012-T		
230V External Pump + 10m Hose Reel + Fuel Management		013-T	011-T	007-T
Codes	1350SBFS- 2500HBFS-	3500VBFS- 6000VBFS- 10000VBFS- 15000VBFS-	30000VBFS-	5000SBFS- 10000SBFS- 20000SBFS- 30000SBFS- 40000SBFS- 50000SBFS- 60000SBFS- 70000SBFS- 80000SBFS- 90000SBFS- 100000SBFS-

## Models and Specifications

### Bunded AdBlue® Storage & Dispensing Tanks / Plastic



#### 1350SLBFSAD

Capacity	Length	Width	Height	Weight
1,350 litres	2,680mm	870mm	1,665mm	190kg



#### 2500HBFSAD

Capacity	Length	Width	Height	Weight
2,500 litres	2,840mm	1,520mm	1,630mm	280kg



#### 3500VBFSAD

Capacity	Diameter	Height	Weight
3,500 litres	2,013mm	2,520mm	350kg

Cabinet:

Height	Width	Depth
2,050mm	1,215mm	600mm



#### 6000VBFSAD

Capacity	Diameter	Height	Weight
6,000 litres	2,550mm	2,585mm	430kg

Cabinet:

Height	Width	Depth
2,050mm	1,215mm	600mm



#### 10000VBFSAD

Capacity	Diameter	Height	Weight
10,000 litres	2,890mm	2,590mm	500kg

Cabinet:

Height	Width	Depth
2,050mm	1,215mm	600mm



#### 15000VBFSAD

Capacity	Diameter	Height	Weight
15,000 litres	2,890mm	3,500mm	700kg

Cabinet:

Height	Width	Depth
2,050mm	1,215mm	600mm



**premium  
quality**

The quality of our tanks make them the best value for money



**ultra  
strong**

Our tanks are the toughest tanks on the market

**total  
satisfaction**



96% of our customers would recommend us

**bespoke  
tanks**

A bespoke tank fabrication allows you to build a tank to your specification

## Models and Specifications

### Specifications – Bunded AdBlue Tanks

	Small AdBlue Dispenser	Small AdBlue Dispenser – Sub Pump Terminating in Cabinet	Large AdBlue Dispenser	Large AdBlue Dispenser – Sub Pump Terminating in Cabinet	Small AdBlue Storage	Large AdBlue Storage
Feature	1350-2500L	1350-2500L	3500-15000L	3500-15000L	1350-2500L	3500-15000L
2" Dy Break Fill Coupling	✓	✓	✓	✓	✓	✓
Screened Vent	✓	✓	✓	✓	✓	✓
External Pump – 230V	001-T		✓			
Submersible Pump – 230V						
Control Panel with Key Switch / Autonozzle Switch		✓	✓	✓		
8m Hose	✓					
Auto Shut Off Nozzle	✓		✓			
Digital Flowmeter	✓		001-T			
FMS Contents Gauge & Alarm – 230V			✓	✓		✓
Stainless Steel 'Y' Filter			✓	✓		
Lockable Cabinet			✓	✓		✓
Nozzle Holster	✓		✓			
Inline Strainer	✓					
Manual Float Level Gauge	✓				✓	
Lockable Flip Lid	✓	✓			✓	
1" Top Suction Outlet with Foot Valve & Ball Valve*					✓	✓
<b>Optional Extras</b>						
Submersible Pump Terminating on Top of inner Tank with 'Y' Filter and Ball Valve		005-T				
Submersible Pump Terminating in Cabinet				005-T		
External Pump – 12V	003-T					
External Pump – 24V	004-T					
External Pump – 240V + Pulsemeter	002-T		002-T			
Pulsemeter + 8m Hose Reel			003-T			
Pulsemeter + 8m Hose Reel + Fuel Management			004-T			
Pulsemeter + Fuel Management			006-T			
Codes	1350SLBFSAD- 2500HBFSDAD-	1350SLBFSAD- 2500HBFSDAD-	3500VBFSDAD- 6000VBFSDAD- 10000VBFSDAD- 15000VBFSDAD-	3500VBFSDAD- 6000VBFSDAD- 10000VBFSDAD- 15000VBFSDAD-	1350SLBAD- 2500HBAD-	3500VBAD- 6000VBAD- 10000VBAD- 15000VBAD-

\*terminating in the cabinet for larger models